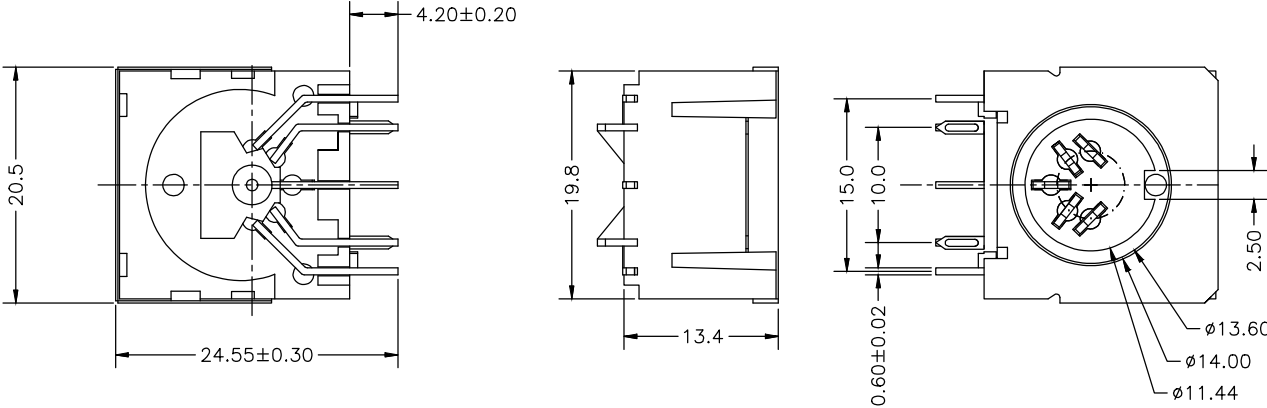
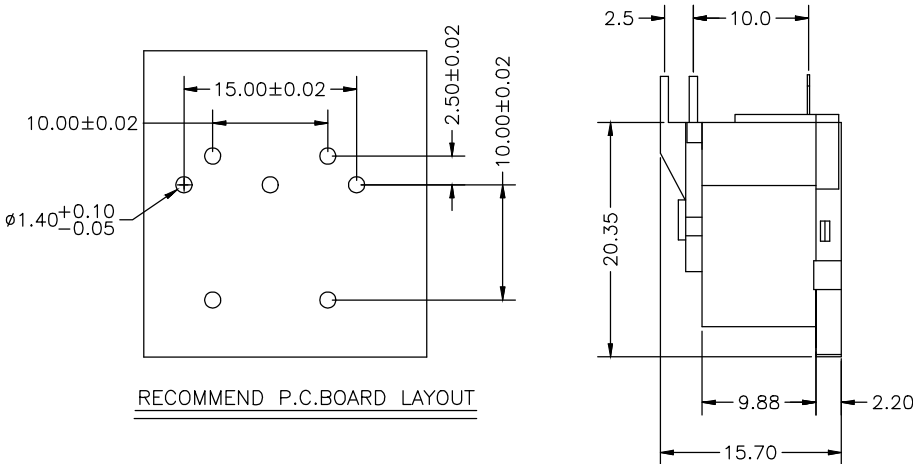


CUSTOMER		SETRON	FILE NO.	088172	THIS DRAWING AND SPECIFICATIONS, HEREIN ARE THE CONFIDENTIAL PROPERTY OF AND SHALL NOT BE REPRODUCED OR COPIED OR DISCLOSED IN WHOLE OR IN PART WITHOUT WRITTEN PERMISSION.	REV.	DESCRIPTION		DRAWN / DATE		APPROVED / DATE	
						0	INITIAL RELEASE		FROS 03/28/2014		FROS 03/28/2014	

RECOMMEND P.C.BOARD LAYOUT

NOTES:

MATERIALS

1. INSULATOR: PBT 30% GLASS FIBER UL94-V0
2. CONTACT & PLATE: BRASS, TIN PLATED

SPECIFICATIONS:

1. CURRENT RATING: 1A
2. DIELECTRIC STRENGTH: AC 1000V/MIN. R.M.S.
3. INSULATOR RESISTANCE: 5000MΩ MIN. AT 500V DC
4. CONTACT RESISTANCE: 8mΩ MAX.
5. OPERATION TEMPERATURE: -55°C TO +105°C

DIMENSIONS ARE IN mm [INCH]		TOLERANCES ARE FRACTIONS DECIMALS ANGLES	MATERIAL	PCB DIN 5 PIN SOCKET	P/N	088172	DRAWN	FROS	DATE	03/25/2014
MOLD NO.		.x ± 0.20 [0.008] .xx ± 0.12 [0.005]	FINISH		PROJECT NO.					
088172			COLOR		SCALE	N/A	SIZE	A4	SHEET	1 OF 1
									MS074	